

AD-A263 445

Draft



Department of Defense


DoD Electronic Data Interchange (EDI) Convention

ASC X12 Transaction Set 838 Trading Partner Profile (Confirmation) (Version 003020)

DL203LN16



January 1993



93-08761

Draft



Department of Defense

DoD Electronic Data Interchange (EDI) Convention

ASC X12 Transaction Set 838 Trading Partner Profile (Confirmation) (Version 003020)

NTIS CRA&I DTIC TAB U announced Justification			
By Distab	By		
Availability Codes		y Codes	
Dist		and / or ecial	
A-1			

Accesion For

TITIC QUALITY THE TELEVISION &

This document was prepared by the Logistics Management Institute for the Defense Logistics Agency under Task DL203. The task was performed under Contract MDA903-90-C-0006 with the Department of Defense. Permission to quote or reproduce any part of this document except for Government purposes must be obtained from the Department of Defense Executive Agent for Electronic Commerce/Electronic Data Interchange/Protection of Logistics Unclassified/Sensitive Systems.

Executive Agent for EC/EDI/PLUS Defense Logistics Agency Cameron Station Alexandria, VA 22304-6100

TABLE OF CONTENTS

1.0	INTRODUCTION 1.01
	1.1 PURPOSE OF THE CONVENTION 1.0.1
	1.2 SCOPE 1.0.1
	1.3 RESPONSIBLE ENTITY 1.0.1
	1.4 HOW TO USE THE IMPLEMENTATION
	CONVENTION
2.0	MAINTENANCE 2.01
	2.1 MAINTAINING CONVENTIONS 2.0.1
	2.2 VERSION/RELEASE TIMING 2.0.1
3.0	DoD CONVENTIONS FOR USING ASC X12 TRANSACTION SETS 3.01
	3.1 INTRODUCTION 3.0.1
	3.2 CONTROL SEGMENTS 3.0.1
	3.2.1 Description of Use
	3.3 EXAMPLE OF CONVENTION USE 3.0.15
	3.4 DoD CONVENTION
4.0	ASC X 12 FORMS 4.01
5.0	GLOSSARY
	5.1 X12 GLOSSARY 5.0.1
	5.2 DoD GLOSSARY 5.0.6

1.0 INTRODUCTION

This chapter explains the purpose of the convention, the scope of the guidance, and provides an explanation of how to use the convention.

1.1 PURPOSE OF THE CONVENTION

The convention provides general guidance on the implementation of American National Standards Institute (ANSI) Accredited Standards Committee (ASC) X12 electronic data interchange (EDI) standards within automated information systems (AIS) and information interchange procedures that require the collection, reporting, and/or exchange of data needed to perform defense missions.

1.2 SCOPE

The guidance is provided for two components. First, it may be used by organizational elements of the DoD community. It may also be useful to organizations external to DoD that exchange data with the DoD community in the course of their business relationships.

The DoD community encompasses the Military Services, Organizations of the Joint Chiefs of Staff, Unified and Specified Commands, Office of the Secretary of Defense, and the Defense agencies. (That community is collectively referred to as the DoD Components.)

Organizational entities external to DoD include (a) non-Government organizations, both commercial and nonprofit; (b) Federal agencies of the United States Government other than DoD; (c) local and state governments; (d) foreign national governments; and (e) international government organizations.

The draft convention published in this document is for trial use and comment. DoD Components must submit to the DoD EDI Executive Agent (EA) their data requirements that are not covered in the conventions as soon as possible, as indicated in Chapter 2.0, Section 2.1.

1.3 RESPONSIBLE ENTITY

The Defense Logistics Agency (DLA) is DoD's Executive Agent for implementing and maintaining Defense-wide programs for (a) EDI in accordance with DepSecDef memorandum of May 24, 1988, Subject: Electronic Data Interchange of Business-Related Transactions; and (b) Protection of Logistics Unclassified/Sensitive Systems (PLUS) in accordance with Assistant Secretary of Defense (Production and Logistics) [ASD(P&L)] memorandum of November 21, 1989, Subject: Production and Logistics Task Group for Data Protection. Publication of these conventions is based upon this authority. See Chapter 2.0 Maintenance, Section 2.1 for office point of contact.

1.4 HOW TO USE THE IMPLEMENTATION CONVENTION

The main topics and structures of this document conform to the EDI Implementation Reference Manual Guidelines document that was developed by a task group of the subcommittee on education and implementation of the ASC X12. The purpose of having agreed-upon topics and structure is to facilitate reference by the many industry and DoD personnel who are involved in implementing the uniform standards for electronic interchange of business transactions.

1.4.1 Conventions, Standards, and Guidelines

The terms conventions, standards, and guidelines are used throughout the document and are defined as follows:

- Conventions are the common practices and/or interpretations of the use of ASC X12 standards. Conventions define what is included in a specific implementation of an ASC X12 standard.
- Standards are the technical documentation approved by ASC X12; specifically, transaction sets, segments, data elements, code sets, and interchange control structure. Standards provide the structure for each ASC X12 document.
- Guidelines are instructions on the use of EDI. They provide additional information to assist in conducting EDI. Guidelines are intended to provide assistance and should not be your sole source of information.

1.4.1.1 Who Develops the Conventions?

Conventions result from a joint effort between business, technical, and EDI ASC X12 standards experts. The business data requirement is defined, a transaction set is selected, and the data requirement is then identified with data elements in the transaction set. A convention is usually developed before any computer EDI systems development work and serves as a design document when the development process begins.

1.4.1.2 Why Use a Convention?

To create an ASC X12 transaction, a user must know the data requirements, understand the ASC X12 standard, and be able to use that information to develop an interface program between the computer application and the ASC X12 translator. The necessary information to perform this task is contained in the convention document. Users who follow the convention will create a transaction set that all DoD users understand.

1.4.1.3 Who Needs a Convention?

System analysts and application programmers who plan to create or read ASC X12 transactions use a convention to aid in interface software design. The convention will help the programmer and analyst identify where their application data requirement should be carried in an ASC X12 transaction set.

1.4.4.4 Can I Develop a Convention?

Conventions already exist for some of the most common business practices. Copies of existing conventions can be acquired through your organization's EDI coordinator at the start of an EDI project. If you find no conventions for the business practice you are about to implement, your EDI coordinator should contact the DoD Executive Agent for EDI. See Chapter 2.0, Maintenance, Section 2.1 for the point of contact.

1.4.2 Documentation of Conventions

Conventions are adopted from, and are intended to be in conformance with, ANSI ASC X12 standards or ASC X12 Draft Standards for Trial Use (DSTU).

1.4.2.1 Transaction Set

Figure 1.4-1 provides an example of a transaction set table. The transaction set defines information of business or strategic significance and consists of a transaction set header segment, one or more data segments in a specified order, and a transaction set trailer segment. The actual ASC X12 standard as it appears in the official ASC X12 standards manual is presented on the right side of the page. This standard also includes both syntax notes and comments. The specific DoD usage designator is presented on the left side of the page.

The designation "N/U" appears in the left column if DoD does not use the specific segment. A page number will appear if the segment is used.

1.4.2.2 Transaction Set Segment

Figure 1.4-2 is an example of a transaction set segment.

DoD usage is specified on the left side of the page. For identifier (ID) — type data elements, acceptable code values are listed on the right side of the page under the definitions of the element.

DoD notes, reflecting how the convention is to be used appear on the right side of the page at the segment level or the data element level.

The following definitions are for use in interpreting the data element requirement designators in the DoD-specific segment directory section of the convention. For ASC X12 usage, see the definitions in X12.6 Application Control Structure.

- Mandatory
 Mandatory data elements are defined by ASC X12.
- Optional
 Optional data elements are used at the discretion of the sending party or are based upon mutual agreement between trading partners.

824 - APPLICATION ADVICE

ANSI ASC X12 VERSION/RELEASE 003010DOD_

824 Application Advice

This standard provides the format and establishes the data contents of the Application Advice Transaction Set (824) within the context of an Electronic Data Interchange (EDI) environment. This transaction set provides the ability to report the results of an application system's data content edits of transaction sets. The results of editing transaction sets can be reported at the functional group and transaction set level, in either coded or free-form format. It is designed to accompdate the business need of reporting the acceptance, rejection or acceptance with change of any transaction set. The Application Advice should not be used in place of a transaction set designed as a specific response to another transaction set (e.g., purchase order acknowledgement sent in response to a purchase order).

Table 1

2 3

LOOP REPEAT	MAX USE	MEG. DEB.	MANEE	SEG. ID	POL #
	1	M	Transaction Set Header	ST	010
	1	M	Beginning Segment	BGN	020
2			LOOP ID - N1		ł
	1	0	Name	N1	030
	2	0	Additional Name Information	N2	040
	2	0	Address Information	N3	050
	1	0	Geographic Location	N4	060
	12	0	Reference Numbers	REF	070
	3	0	Administrative Communications Contact	PER	080

Table 2

PAGE	POL I	SEG. 10	MIE	MEQ. DES.	MAX UBE	LOOP REPEAT
			LOOP ID - OTI	·		10000
10	010	OTI	Original Transaction Identification	M	1	
12	020	REF	Reference Numbers	0	12	ł
13	030	DTM	Date/Time Reference	0	2	ļ
N/U	040	PER	Administrative Communications Contact	0	3	
N/U	050	AMT	Monetary Amount	0	10	
N/U	060	QTY	Quantity	0	10	
			LOOP ID - TED			10000
14	070	TED	Technical Error Description	0	1]]
15	080	NTE	Note/Special Instruction	0	100	
16	090	SE	Transaction Set Trailer	М	1	

1

DA01 - JANUARY 29 1993

Figure 1.4-1 Example of a Transaction Set Table

DEPARTMENT OF DEFENSE DRAFT IMPLEMENTATION CONVENTION

824 - APPLICAT BGN - BEGINNII			ANSI ASC X12 VERSION/R	ELEA	SE 003	010DOD
	Se	gment:	BGN Beginning Segment			
		Level:	Header			
		Loop:				
Mandatory		Usage:	Mandatory			
	Ma	ax Use:	1			
	PL	прозе:	To indicate the beginning of a transaction set.			
	5	Syntax:	If BGN05 is used, BGN04 is required.			
	Com	ments:	1. BGN02 is the Transaction Set Reference Number.			
			2. BGN03 is the Transaction Set Date.			
			3. BGN04 is the Transaction Set Time.			
			4. BGN05 is the transaction set time qualifier.			
			Data Element Summary			
	REP. DES.	DATA	MANUE		ATTRE	UTTES .
Mandatory	BGN01	353	Transaction Set Purpose Code Code identifying purpose of transaction set.	M	ID	2/2
		00	Original			
			Cancellation			
			Change Not Processed			
Mandatory	BGN02	127	Reference Number Reference number or identification number as defined for a p Transaction Set, or as specified by the Reference Number Or			1/30
Mandatory	BGN03	373	Date (YYMMDD).	M	DT	6/6
Conditional	BGN04	337	Time Time expressed in 24-hour clock time (HHMM, time range: 0)	C C	TM	4/4
	Impleme Use HHM	entation (M.	· · · · · · · · · · · · · · · · · · ·	JOO (1)	ougn i	ຜ ວອງ.
Not Used	BGN05	623	Time Code	0	ID	2/2
			3 04	- 101 · J	ANUAF	RY 29 199

Figure 1.4-2 Example of a Transaction Set Segment

DA01 - JANUARY 29 1993

Required

Required data elements are considered optional under ASC X12 rules, but are required by DoD decision.

Recommended

Recommended data elements are considered optional under ASC X12 rules and by the DoD, but the industry recommends their use to facilitate EDI. Most companies in the industry are expected to use this data element.

· Not Used

"Not Used" data elements are those that the DoD does not use.

Conditional

Conditional data elements depend on the presence of other data elements in the transaction set.

2.0 MAINTENANCE

This chapter describes the procedures for maintaining the DoD conventions. It also presents a section on version/release timing.

2.1 MAINTAINING CONVENTIONS

The DLA, as DoD's Executive Agent for EDI and PLUS, has established a joint program office to oversee implementation of EDI. Some of the functions of this program office are to maintain configuration control of related standards and common support packages (e.g., versions of ASC X12 standards and PLUS algorithms employed), participate in the standards-setting process, and ensure compliance with approved EDI standards.

To accomplish these functions, the joint program office has established a conventions and standards development and maintenance process whose objectives are: (1) to obtain ASC X12 data requirements from the DoD Components and present the requirements to the ASC X12 for consideration as ANSI standards, and (2) to develop and maintain conventions for use by DoD Components and their potential trading partners.

To take advantage of, and not duplicate, existing data standardization processes, the EA has established focal points within the ASD Offices, the Military Services, and the Defense Agencies from which EDI information is obtained and disseminated.

The EA's primary source of information about DoD's data requirements is the EDI User.

Changes to this publication and recommended changes to ANSI ASC X12 should be forwarded through your organizational point of contact for data standardization to:

EDI Standards Coordinator ATTN: DLA-ZC Cameron Station Alexandria, VA 22304-6100

See Chapter 4 for reproducible ASC X12 Work Request forms.

2.2 VERSION/RELEASE TIMING

Identification of the official "version" of a standard is critical to the successful interchange of information. Each participant must be able to send and receive the same version to ensure the accuracy of the information exchanged.

The version is transmitted as a 12-character code in the Functional Group Header segment (GS) in Data Element #480, Version/Release/Industry ID. This 12-character code is used by ASC X12 as follows:

<u>Position</u>	Content
1-3	Version number
4–5	Release level of version
6	Subrelease
7–12	DoD/Industry or Trade Association ID

ASC X12 assigns the codes in positions 1 through 6.

A major version (1-3) will change only after an official public review cycle, leading to republication of a new American National Standard.

Release level of each new major version (4-6) will begin at "000" and incremented by 1 for each new ASC X12 approved publication cycle, usually once a year. The fifth character designates the release and the sixth character designates the subrelease.

DoD/Industry/Trade Association ID (7-12) is used to identify conventions. For this suffix, DoD will use "DoD_" with the 10th character identifying successive publications. The 11th and 12th characters may be used by the Military Departments or Defense Agencies.

DoD conventions for using ASC X12 standards are published annually. Conventions developed for each release will be maintained for 4 years. Military Services and DoD Agencies will determine which release to use on the basis of business need but will not use any release more than 4 years old without approval of the DoD EA.

3.0 DoD CONVENTIONS FOR USING ASC X12 TRANSACTION SETS

This chapter defines the DoD transaction set conventions. It includes the instructions for implementing the control structure and definitions of the usage indicators and applicable codes.

3.1 INTRODUCTION

The power of the ASC X12 standard is in its building block concept, which standardizes the essential elements of business transactions. It is analogous to a "standard bill of materials and the construction specifications," which gives the architect flexibility in what can be designed with standardized materials and procedures. The EDI system designer, like the architect, uses the ASC X12 standards to build business transactions that are often different because of their function and yet utilize the ASC X12 standards. The "bill of materials and the construction specification" of ASC X12 are the standards found in the published technical documentation.

ASC X12.3 - The *Data Element Dictionary* specifies the data elements used in the construction of the segments that comprise the transaction sets developed by ASC X12.

ASC X12.5 – The *Interchange Control Structure* provides the interchange control segment (also called an envelope) of a header and trailer for the electronic interchange through a data transmission; it also provide a structure to acknowledge the receipt and processing of the envelope.

ASC X12.6 - The Application Control Structure defines the basic control structures, syntax rules, and semantics of EDI.

ASC X12.22 – The *Data Segment Directory* provides the definitions and specifications of the segments used in the construction of transaction sets developed by ASC X12.

The DoD convention in Section 3.4 conform to the above standards and each transaction set is a complete document to the extent possible. For further clarification of acronyms, abbreviations, and codes, refer to ASC X12 published technical documentation. Contact the DoD EDI Executive Agent for copies or the Data Interchange Standards Association, Inc., Suite 355, 1800 Diagonal Road, Alexandria, VA 22314.

3.2 CONTROL SEGMENTS

In addition to the communication control structure, the EDI structure provides the standards user with multiple levels of control to ensure data integrity. It does so by using header and trailer control segments

designed to identify uniquely the start and end of the interchange functional groups and transaction sets. The relationship of these control segments is shown in Figure 3.2-1. Control Segment specifications are defined in Section 3.2.2.

3.2.1 Description of Use

The interchange header and trailer segments surround one or more functional groups or interchange-related control segments and perform the following functions:

- Define the data element separators and data segment terminators
- · Identify the sender and receiver
- · Provide control information
- · Allow for authorization and security information.

The Interchange Acknolwedgment Segment is used to acknowledge one interchange header and trailer envelope where the envelope surrounds one or more functional groups. (No acknowledgment is made for the interchange acknowledgment.)

The interchange control number value in the acknowledgment (TA1 segment) is the same as that for the ISA segment that is being acknowledged. The control number serves as a link between the interchange header and trailer and the acknowledgment of that header and trailer.

The interchange acknowledgment does not report any status on the functional groups contained in the interchange and is separate from the communication system's error procedures.

The preparer of the interchange header and trailer indicates the level of acknowledgment in Data Element 113, Acknowledgment Requested. If an acknowledgment is requested, then the recipient must return an acknowledgment. If not requested, none should be given.

The interchange acknowledgment control segments are placed after the interchange header and before the first functional group or before the interchange trailer if there are no functional groups.

Control segments are standard for all implementation conventions produced for the Department of Defense. Some codes associated with individual data elements within the control segments are unique to the individual transaction set. Others, identify the ANSI version and release in which the convention is written.

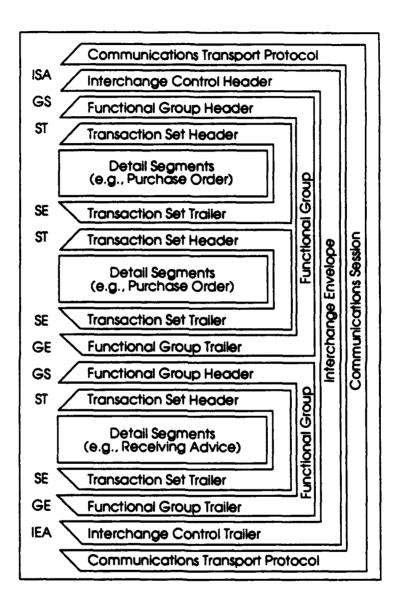


Figure 3.2-1. Hierarchical Structure

838 · CONFIRMATION

ANSI ASC X12 VERSION/RELEASE 003020DOD_

3.2.2 Control Segment Specifications

838 · CONFIRMATION

ANSI ASC X12 VERSION/RELEASE 003020DOD_

001 · CONTROL SEGMENTS ISA · INTERCHANGE CONTROL HEADER 838 CONFIRMATION ANSI ASC X12 VERSION/RELEASE 003020DOD_

Segment: ISA Interchange Control Header

Purpose: To start and identify an interchange of one or more functional groups

and interchange-related control segments.

1			and merchange rolated control segments.			
			Data Element Summary			
	REF. DES.	DATA ELEMENT	NAME		ATTRIB	ЛES
andatory	ISA01	101	Authorization Information Qualifier Code to identify the type of information in the Authorization Info	M rma	ID tion.	2/2
		00	No Authorization Information Present (No Meaningful Information	on in	102)	
ndatory	ISA02	102	Authorization Information Information used for additional identification or authorization of data in the interchange. The type of information is set by the Authorization Qualifier.			
j L		entation porization	Note: information is agreed to by trading partners, fill field with blanks.			
atory	ISA03	103	Security Information Qualifier Code to identify the type of information in the Security Informat	M ion.	ID	2/2
ľ		01	Password			
ory	ISA04	104	Security Information This is used for identifying the security information about the se in the interchange. The type of information is set by the Securit Qualifier.			
		entation d upon pa	Note: ssword. If no security information is agreed to by trading partners, fill	field	with b	lanks.
tory	ISA05	105	Interchange ID Qualifier Qualifier to designate the system/method of code structure use sender or receiver ID element being qualified.	M d to	ID desigr	2/2 nate the
1		ZZ	Mutually Defined			
		An agree	alue Implementation Note: d upon designation of DoD Activity Address Code (DoDAAC) or other value-added network (VAN).	cod	e coord	linated
ory	ISA06	106	Interchange Sender ID Identification code published by the sender for other parties to receiver ID to route data to them. The sender always codes this sender ID element.			15/15 n the
	DoD acti		Department of Defense Activity Address Code (DoDAAC) or other coa twork (VAN). Non-DoD activities use identification code qualified by I			ed with
datory	ISA07	105	Interchange ID Qualifier	М	ID	2/2

ISA07 I05 Interchange ID Qualifier M ID 2/2
Qualifier to designate the system/method of code structure used to designate the sender or receiver ID element being qualified.

ZZ Mutually Defined

838 CONFIRMATION ANSI ASC X12 VERSION/RELEASE 003020DOD 001 · CONTROL SEGMENTS ISA · INTERCHANGE CONTROL HEADER

Code Value Implementation Note:

An agreed upon designation of DoD Activity Address Code (DoDAAC) or other code coordinated with the value-added network (VAN).

Mandatory

ISA08 I07 Interchange Receiver ID

M ID 15/15

Identification code published by the receiver of the data. When sending, it is used by the sender as their sending ID, thus other parties sending to them will use this as a receiving ID to route data to them.

Implementation Note:

DoD activities use Department of Defense Activity Address Code (DoDAAC) or other code coordinated with the value-added network (VAN). Non-DoD activities use identification code qualified by ISA05 and coordinated with the VAN.

Mandatory

ISA09 I08 Interchange Date
Date of the interchange.

DT 6/6

Implementation Note:

Assigned by translation software. YYMMDD

Mandatory

ISA10 I09 Interchange Time
Time of the interchange.

A TM 4/4

Implementation Note:

Assigned by translation software. HHMM

Mandatory

ISÂ11 I10 Interchange Control Standards Identifier M ID 1/1
Code to identify the agency responsible for the control standard used by the message that is enclosed by the interchange header and trailer.

U U.S. EDI Community of ASC X12, TDCC, and UCS

Mandatory

ISA12 I11 Interchange Control Version Number M ID 5/5
This version number covers the interchange control segments and the functional group control segments.

00302 Draft Standard for Trial Use Approved for Publication by ASC X12 Procedures Review Board Through October 1991

Code Value Implementation Note:

Version ID as defined or agreed upon by the trading partners.

Mandatory

ISA13 I12 Interchange Control Number M No 9/9

This number uniquely identifies the interchange data to the sender. It is assigned by the sender. Together with the sender ID it uniquely identifies the interchange data to the receiver. It is suggested that the sender, receiver, and all third parties be able to maintain an audit trail of interchanges using this number.

Mandatory

ISA14 I13 Acknowledgment Requested M ID 1/1
Code sent by the sender to request an interchange acknowledgment.

0 No Acknowledgment Requested

1 Interchange Acknowledgment Requested

Mandatory

ISA15 I14 Test Indicator

M ID 1/1

Code to indicate whether data enclosed by this interchange envelope is test or production.

P Production Data

T Test Data

001 · CONTROL SEGMENTS ISA · INTERCHANGE CONTROL HEADER 838 CONFIRMATION ANSI ASC X12 VERSION/RELEASE 003020DOD_

Code Value Implementation Note:

Assigned by translation software.

Mandatory

ISA16 I15 Subelement Separator

M AN 1/1

This is a field reserved for future expansion in separating data element subgroups. (In the interest of a migration to international standards, this should be different from the data element separator).

Implementation Note:

Use character "<".

838 CONFIRMATION ANSI ASC X12 VERSION/RELEASE 003020DOD 001 · CONTROL SEGMENTS
GS · FUNCTIONAL GROUP HEADER

Segment: GS Functional Group Header

Purpose: To indicate the beginning of a functional group and to provide control

information

Syntax: The data interchange control number (GS06) in this header must be

identical to the same data element in the associated Functional Group

Trailer (GE02).

Comment: A functional group of related transaction sets, within the scope of X12

standards, consists of a collection of similar transaction sets enclosed by

a functional group header and a functional group trailer.

Data Element Summary

Mandatory

REF. DES. PLATA NAME ATTRIBUTES

GS01 479 Functional Identifier Code M ID 2/2
Code identifying a group of application related Transaction Sets.

Implementation Note:

Choose the code value appropriate to the information content of the functional group. See X12 Dictionary for source code list.

TD Trading Partner Profile (838)

Mandatory

GS02 142 Application Sender's Code

I AN 2/15

Code identifying party sending transmission. Codes agreed to by trading

partners.

Implementation Note:

DoD activities use Department of Defense Activity Address Code (DoDAAC). Non-DoD activities use identification code assigned by DoD activity. Recommend for increased security that non-DoD code differ from that used in ISA06.

Mandatory

124 Application Receiver's Code

M AN 2/15

Code identifying party receiving transmission. Codes agreed to by trading

partners.

Implementation Note:

GS03

DoD activities use Department of Defense Activity Address Code (DoDAAC). Non-DoD activities use identification code assigned by DoD activity. Recommend for increased security that non-DoD code differ from that used in ISA08.

Mandatory

GS04 29 Group Date

M DT 6/6

Date sender generated a functional group of transaction sets.

Implementation Note:

Assigned by translation software.

Mandatory

GS05 30 Group Time

M TM 4/4

Time (HHMM) when the sender generated a functional group of transaction sets

(local time at sender's location).

Implementation Note:

Assigned by translation software.

Mandatory

GS06 28 Group Control Number

M NO 1/9

Assigned number originated and maintained by the sender.

001 · CONTROL SEGMENTS
GS · FUNCTIONAL GROUP HEADER

GS08

838 CONFIRMATION ANSI ASC X12 VERSION/RELEASE 003020DOD

Implementation Note:

Assigned by translation software.

Mandatory

GS07 455 Responsible Agency Code

I ID 1/2

Code used in conjunction with Data Element 480 to identify the issuer of the

standard.

X Accredited Standards Committee X12

Code Value Implementation Note:

Indicates that an ANSI X12 standard is being transmitted.

Mandatory

480 Version/Release/Industry ID Code

I ID 1/12

Code indicating the version, release, subrelease and industry identifier of the EDI standard being used. Positions 1-3, version number; positions 4-6, release and

subrelease level of version; positions 7-12, industry or trade association identifier (optionally assigned by user).

003020 Draft Standards Approved By ASC X12 Through June 1991.

Code Value Implementation Note:

Code value agreed to by trading partners. See X12 Dictionary for source code list.

838 CONFIRMATION ANSI ASC X12 VERSION/RELEASE 003020DOD 001 • CONTROL SEGMENTS GE • FUNCTIONAL GROUP TRAILER

Segment: GE Functional Group Trailer

Purpose: To indicate the end of a functional group and to provide control

information

Syntax: The data interchange control number (GE02) in this trailer must be

identical to the same data element in the associated Functional Group

Header (GS06).

Comment: The use of identical data interchange control numbers in the associated

functional group header and trailer is designed to maximize functional group integrity. The control number is the same as that used in the

corresponding header.

Data Element Summary

Mandatory

REF. DATA
DES. PLEMENT NAME

ATTRIBUTES

ATTRIBUTES

GE01 97 Number of Transaction Sets Included M NO 1/6

Total number of transaction sets included in the functional group or interchange

total number of transaction sets included in the functional group or interchange (transmission) group terminated by the trailer containing this data element.

Implementation Note:

Assigned by translation software.

Mandatory

GE02 28 Group Control Number M N0 1/9
Assigned number originated and maintained by the sender.

Implementation Note:

Assigned by the translation software. This control number must match the control number of the preceding GS06 control number.

9/9

001 · CONTROL SEGMENTS IEA · INTERCHANGE CONTROL TRAILER

838 CONFIRMATION ANSI ASC X12 VERSION/RELEASE 003020DOD

Segment: IEA Interchange Control Trailer

Purpose: To define the end of an interchange of one or more functional groups

and interchange-related control segments.

Data Element Summary

Mandatory

REF. DES.	DATA ELEMENT	NAME		ATTRIBU	TES
IEA01	116	Number of Included Functional Groups	M	NO	1/5
		A count of the number of functional groups included in a transm	nissi	on.	

Implementation Note:

Assigned by translation software.

Mandatory

IEA02 Interchange Control Number NO 112 This number uniquely identifies the interchange data to the sender. It is assigned

by the sender. Together with the sender ID it uniquely identifies the interchange data to the receiver. It is suggested that the sender, receiver, and all third parties be able to maintain an audit trail of interchanges using this number.

Implementation Note:

Assigned by the translation software. This number must match the number that occurs in ISA13.

ANSI ASC X12 VERSION/RELEASE 003020DOD

838- CONFIRMATION

ANSI ASC X12 VERSION/RELEASE 003020DOD_

3.3 EXAMPLE OF CONVENTION USE

BASELINE AS OF: JANUARY 29, 1993

3.0.15

838 · CONFIRMATION

ANSI ASC X12 VERSION/RELEASE 003020DOD

EXAMPLE - TRADING PARTNER PROFILE-CONFIRMATION (838 C)

ASC X12 EDI FORMAT	<u>DEFINITION</u>
ST*838*C1010 N/L	THIS IS AN 838 CONFIRMATION OF REGISTRATION TRANSACTION SET WITH A CONTROL NUMBER OF C1010.
BTP*07*CON1200*930129*0830*TP*11* REG001*930128 N/L	A DUPLICATE CONFIRMATION WITH A REFERENCE NUMBER OF CON1200 CREATED ON JANUARY 29, 1993 AT 8:30 A.M IT RESPONDS TO THE REGISTRATION WITH A REFERENCE NUMBER OF REG001 WHICH WAS CREATED ON JANUARY 28, 1993.
PLA*4*SE*930201 N/L	CONFIRMS A SUCCESSFUL REGISTRATION WITH AN EFFECTIVE DATE OF FEBRUARY 1, 1993.
N1*ZZ**33*1B712 N/L	CONFIRMS THE REGISTERING PARTY'S CAGE CODE OF 1B712.
N9*VR*JCJ1221 N/L	PROVIDES THE VENDOR WITH PASSWORD JCJ1221.
SE*6*C1010 N/L	THE TRANSACTION HAS 6 SEGMENTS AND THE CONTROL NUMBER IS C1010.

NOTE: ALL NUMBERS ARE NOTIONAL AND USED FOR ILLUSTRATION PURPOSES ONLY.

838 · CONFIRMATION

ANSI ASC X12 VERSION/RELEASE 003020DOD_

838•	CON	4FIR	MA	TIO	N

ANSI ASC X12 VERSION/RELEASE 003020DOD_

3.4 DoD CONVENTION

838 · CONFIRMATION

ANSI ASC X12 VERSION/RELEASE 003020DOD_

838 Trading Partner Profile

This standard provides the format and establishes the data contents of the Trading Partner Profile Transaction Set within the context of an Electronic Data Interchange (EDI) environment. This transaction set can be used to request, change, verify or transmit business profile information to or from a trading partner. This information can be used by the receiver to facilitate the processing of the sender's business transactions.

The transaction set may be used to convey government survey information, business classification, general survey information, summary supplier ratings, changes in the EDI environment information, tax information, entity relationships, and general business profile information to update automated information databases between trading partners.

Table 1

PAGE #	POS.#	SEG. ID	NAME_	REQ. DES.	MAX USE	LOOP REPEAT
4	010	ST	Transaction Set Header	M	1	
5	020	BTP	Beginning Segment For Trading Partner Profile	M	1	
			LOOP ID - PLA			71
7	030	PLA	Place or Location	M	1	
N/U	040	LCD	Place/Location Description	0	>1	
N/U	050	LIN	Item Identification	0	>1	
			LOOP ID - N1			51
8	060	N1	Name	M	1	
N/U	070	N2	Additional Name Information	0	2	
N/U	080	N3	Address Information	0	2	
N/U	090	N4	Geographic Location	0	1	
9	100	N9	Reference Number	0	>1	
N/U	110	PER	Administrative Communications Contact	0	>1	
N/U	120	CUR	Currency	0	>1	
N/U	130	TAX	Tax Reference	0	>1]]
N/U	140	FOB	F.O.B. Related Instructions	0	>1	
N/U	150	ITD	Terms of Sale/Deferred Terms of Sale	0	>1	
N/U	160	TD5	Carrier Details (Routing Sequence/Transit Time)	0	>1	
N/U	170	FBB	Foreign and Industry Business	0	>1	
			LOOP ID - TPD			
10	180	TPD	Trading Partner Detail	0	1	
N/U	190	N9	Reference Number	0	>1	
N/U	200	PID	Product/Item Description	0	>1	

	DRAFT IMPLEMENTATION CONVENTION
838 · CONFIRMATION	ANSI ASC X12 VERSION/RELEASE 003020DOD
	With each occurence of the PLA loop, the sum of FBB03 for separately identified countries cannot exceed 100.

ANSI ASC X12 VERSION/RELEASE 003020DOD

838 · CONFIRMATION ST · TRANSACTION SET HEADER

Segment:	ST	Transaction Set Header
----------	----	-------------------------------

Level: Header

Loop: ___

Mandatory

Usage: Mandatory

Max Use: 1

Purpose: To indicate the start of a transaction set and to assign a control number

Comment: The transaction set identifier (ST01) is intended for use by the translation

routines of the interchange partners to select the appropriate transaction

set definition (e.g., 810 selects the invoice transaction set).

Implementation Note:

Implementation convention for the CONFIRMATION OF REGISTRATION mapping.

Data Element Summary

Mandatory

REF. DES.	DATA ELEMENT	NAME	ATTRIBUTES			
ST01	143	Transaction Set Identifier Code Code uniquely identifying a Transaction Set.	M	ID	3/3	
	838	X12.17 Trading Partner Profile				
ST02	329	Transaction Set Control Number	М	AN	4/9	

Mandatory

ST02 329 Transaction Set Control Number M AN 4/
Identifying control number assigned by the originator for a transaction set.

838 · CONFIRMATION BTP · BEGINNING SEGMENT FOR TRADING PARTNER PROFILE

ANSI ASC X12 VERSION/RELEASE 003020DOD

	·	Level:	BTP Beginning Segment For Trading Partner Profil Header	е		
Mandatany		Loop:	Mandalan.			
Mandatory		•	Mandatory			
		x Use:				
		-	To indicate the type and purpose of the profile data			
	S	yntax:	1. C0807 — If BTP08 is present, then BTP07 is required	•		
			2. C0908 — If BTP09 is present, then BTP08 is required	•		
Ì	Comr	nents:	1. BTP01 indicates the purpose of this EDI transmission.			
			2. BTP02 is the identifying number of this transaction.			
			3. BTP03 and BTP04 are the transaction set date and time	ne.		
			4. BTP06 indicates the status of the data content within t	he t	ransa	ction.
			5. BTP07 indicates reference number or previous reference associated with this transaction.	ice i	numb	er
			6. BTP08 and BTP09 are date and time associated with	ВТР	07.	
			Data Element Summary			,
	REF. DES.	DATA ELEMENT	NAME		ATTRIB	леѕ
Mandatory	BTP01	353	Transaction Set Purpose Code Code identifying purpose of transaction set.	M	ID	2/2
		00	Original			
		- •	Cancellation			
			Add			
		-	Delete Change			
			Duplicate			
Mandatanı	DTDOO			8.0		4/00
Mandatory	BTP02	127	Reference Number Reference number or identification number as defined for a par Transaction Set, or as specified by the Reference Number Qua			1/30
		by the orig	Note: ginator of the transaction set. In this context, assign a unique referenc I in any subsequent transaction.	e nur	nber th	at can
Mandatory	ВТР03	373	Date Date (YYMMDD).	M	DT	6/6
	Impleme Date the tr		Note: n was created.			
Mandatory	BTP04	337	Time Time expressed in 24-hour clock time (HHMMSS) (Time range 235959)	M : 000	TM 0000 ti	4/6 nrough
	Impleme Time the ti		•			

ANSI ASC X12	VERSION/RE	LEASE 0	03020DOD_	BTI	P · BEGINN	ING SEGMI	NT FOR TR	ADING PA	RTNER	PROFILE
Mandatory	BTP05	640	Transaction Code specifying			action.		M	ID	2/2
		TP	Trading Partne	er Informa	ation					
Mandatory	ВТР06	353	Transaction S Code identifyi			action set.		M	ID	2/2
	Impleme Use code		Note: cate that the trar	isaction re	sponds to a	previously :	submitted re	quest for en	rollmen	ıt.
		11	Response							
Conditional	ВТР07	127	Reference Nu Reference nu Transaction S	mber or id						1/30
	Impleme Use to car transactio	ry the rej	ference number f	rom BTP0.	2 of the inco	oming regist	ration transe	action to wh	ich this	
Conditional	ВТР08	373	Date Date (YYMMD	D).				С	DT	6/6
	Impleme Use to car respondin	ry the da	Note: te from BTP03 o _j	f the incom	ning registr	ation transa	ction to whic	h this trans	action i	s
Not Used	ВТР09	337	Time					0	TM	4/6

838 •	CONFI	RMATI	ON	
PLA	 PLAC 	E OR L	OCAT	TION

ANSI ASC X12 VERSION/RELEASE 003020DOD_

Loo Usag lax Us curpos nment	e: To indicate action to be taken for the location specified as location specified s: 1. PLA03 is the effective date for the action identified in F 2. When used, PLA04 is the effective time for the action is PLA01. Data Element Summary T NAME Action Code	PLAC)1. tified i	n
Usaglax Userpose	e: Mandatory e: 1 e: To indicate action to be taken for the location specified at location specified e: 1. PLA03 is the effective date for the action identified in F 2. When used, PLA04 is the effective time for the action if PLA01. Data Element Summary T NAME Action Code	PLA()1. tified i	n
lax Us curpos nment	2: To indicate action to be taken for the location specified at location specified 3: 1. PLA03 is the effective date for the action identified in F 2. When used, PLA04 is the effective time for the action in PLA01. Data Element Summary Action Code	PLA()1. tified i	n
oat/	e: To indicate action to be taken for the location specified as location specified s: 1. PLA03 is the effective date for the action identified in F 2. When used, PLA04 is the effective time for the action is PLA01. Data Element Summary T NAME Action Code	PLA()1. tified i	n
nment	location specified 3: 1. PLA03 is the effective date for the action identified in F 2. When used, PLA04 is the effective time for the action is PLA01. Data Element Summary T NAME Action Code	PLA()1. tified i	n
DAT/ ELEME	2. When used, PLA04 is the effective time for the action in PLA01. Data Element Summary MANNE Action Code	den	ATTRIBU	 .
	Data Element Summary T NAME Action Code		ATTRIBU	
	Action Code			res
	Action Code	м		TES
		М		
306	Code indicating type of action.		ID	1/1
e 4 to in	n Note: licate a confirmation of a successful registration request. Use code 9 to in st could not be processed.	ıdica	te that	!he
	4 Verify			
	9 Not Capable of Taking Action			
98	Entity Identifier Code Code identifying an organizational entity or a physical location.	M	ID	2/2
	SE Selling Party			
373	Date Date (YYMMDD).	M	DT	6/6
		0	тм	4/6
		nentation Note: e date of status reported in PLA01.	nentation Note:	nentation Note: e date of status reported in PLA01.

ANSI ASC X12 \	/ERSION/RE	LEASE 0		38 •		RMATION 1 • NAMI
	Seg	ment:	N1 Name			
		Level:	Header			
		Loop:	N1 Repeat: >1			
Mandatory		Jsage:	Mandatory			
	Ma	x Use:	1			
	Pu	rpose:	To identify a party by type of organization, name and coo	de		
		•	1. R0203 — At least one of N102 or N103 is required.			
		-	2. P0304 — If either N103 or N104 is present, then the o	thei	is rec	uired.
	Con	nment:	This segment, used alone, provides the most efficient me providing organizational identification. To obtain this effic Code" (N104) must provide a key to the table maintained transaction processing party.	cien	cy the	"ID
			Data Element Summary			
	REF. DES.	DATA ELEMENT	NAME		ATTRIBU	/TES
Mandatory	N101	98	Entity Identifier Code Code identifying an organizational entity or a physical location.	M	ID	2/2
	Impleme Use code		Note: e registering party.			
		ZZ	Mutually Defined			
Conditional	N102	93	Name Free-form name.	С	AN	1/35
Conditional	N103	66	Identification Code Qualifier Code designating the system/method of code structure used for Code (67).	C or Ide	I D entifica	1/2 tion
	Impleme		Note: emporary CAGE Code.			
		ZZ for a t	emporary CAGE Code.			
		•	Commercial and Government Entity (CAGE)			
		33				

code.

838 - CONFIRMATION	
N9 · REFERENCE NUMBER	a

ANSI ASC X12 VERSION/RELEASE 003020DOD_

Segment: N9 Reference Number

Level: Header

Loop: N1

Usage: Optional

Max Use: >1

Purpose: To transmit identifying numbers and descriptive information as specified

by the reference number qualifier

Syntax: R0203 -- At least one of N902 or N903 is required.

Implementation Note:

This segment is REQUIRED when the registrant has been accepted into the program (e.g., when PLAO1 is code 4).

Data Element Summary

Mandatory

Optional

REF. DES.	DATA ELEMENT	NAME		ATTRIBUT	ES
N901	128	Reference Number Qualifier Code qualifying the Reference Number.	M	iD	2/2

Implementation Note:

This code qualifies the government assigned password to be carried in the ISA04 data element for all transactions originating from registered vendors.

VR Vendor ID Number

Conditional

N902	127	Reference Number	С	AN	1/30
		Reference number or identification number as defined for a pa	articu	lar	
		Transaction Set, or as specified by the Reference Number Qu	alifie	r.	

Implementation Note:

This number will be provided by the Government and will represent the government assigned password to be used by an enrolled company when submitting a quote.

Not Used	N903	369	Free-form Description	С	AN	1/45
Not Used	N904	373	Date	0	DT	6/6
Not Used	N905	337	Free-form Description Date Time	0	TM	4/6

Segment: TPD Trading Partner Detail

Level: Header

Loop: TPD Repeat: >1

Usage: Optional

Max Use: 1

Purpose: To describe attribute of a trading partner

Syntax: P0203 — If either TPD02 or TPD03 is present, then the other is required.

Implementation Note:

Use this segment when PLA01 is code 9 to explain why the registration request could not be processed.

Data Element Summary

Mandatory	,

Optional

DES.	ELEMENT	NAME		ATTRIBU	JTES
TPD01	349	Item Description Type Code indicating the format of a description.	M	ID	1/1
	F	Free-form			
TPD02	23	Commodity Code Qualifier	С	ID	1/1
TPD03	22	Commodity Code	С	AN	1/16
TPD04	352	Description	0	AN	1/80
		A free-form description to clarify the related data elements ar	na thei	r conte	nt.

Not Used
Not Used
Optional

Implementation Note:

Explain why the application could not be processed.

838 - CONFIRMATION SE - TRANSACTION SET TRAILER

ANSI ASC X12 VERSION/RELEASE 003020DOD

Segment: SE Transaction Set Trailer

Level: Header

Loop: ___

Mandatory Usage: Mandatory

Max Use: 1

Purpose: To indicate the end of the transaction set and provide the count of the

transmitted segments (including the beginning (ST) and ending (SE)

segments).

Comment: SE is the last segment of each transaction set.

Data Element Summary

Mandatory

REF. DATA DES. ELEMENT		NAME		TES	_	
SE01	96	Number of Included Segments Total number of segments included in a transaction set including	M ng Si	N0 Fand S	1/6 SE	
		segments.				
0500	000	Towns and an Oak Oambook Normbook			410	

Mandatory

SE02 329 Transaction Set Control Number M AN 4/9 Identifying control number assigned by the originator for a transaction set.

Implementation Note:

This is the same number as the one in ST02.

4.0 ASC X 12 FORMS

In this chapter, applicable ASC X12 forms are presented.

X12/DISA REPORMATION MANUAL



VIII - FORMS, FORMS, FORMS

ASC X12 Work Request Form

ASC X12 New Project Proposal Form

ASC X12 New Transaction Set Development Form

Form for New or Revised Appendix A Code Source Reference

Document Preparation for Interpretations, Guidelines and Control Standards

Sample Transmittal Form

ASC X12 Ballot Comment Response Letter Format

ASC X12 Standards Order Form

Rev. 5/10/90			DM NUMBER
DATE SUBMITTED		ASC X12	(Secretariat Only)
		WORK REQUEST FO)RM
	ALL REQUESTS	MUST BE TYPED or printed legibly in I	black ink. Complete both sides.
requirement on	ONE form. Use attack	TING DATA MAINTENANCE FOR A NEW DRAFT ments as necessary. List first all new segments s and data elements/codes/code sources. The	, then all new data elements/codes/code sources.
one transaction		control structure, or one data element. All secti	separate Work Request Form to list all changes for lone must be completed. Attachments may be used
new features inv	volved in Section B. P		ection A. Provide a purpose/scope and describe any stification for the new project in Section C/Part II. The preparation of a project proposal.
Circle One:	(2) Existing Sta	ard Supporting Data Maintenance (use and supporting Data Maintenance Request (see Section New X12 Project	
	ts for all externally pul		ust be clearly explained. Provide Appendix A code se with inadequate support for the change requested
A. SUBMITT	ER INFORMATIC	N	
Submitter:	Name		
	Company		
	Address		
	Address/ZIP		
	Phone		
I declare that	this represents t	or task group whose position is represe he official position of X12 WORK GRO ed	orted here. OUP:
B. PROPOSE	D WORK: List the	specific changes to the standards beindards, segments, data elements and c	ng requested. Give the names and odes affected.

Page Two				
	release of the states and that dictates	the requested ch	sing or using as a reference. ranged. List affected segmen	
Reference Source Transaction Set Used Segment Affected Data Element Affected Other Standard	Version 2/Rele			
Part II: Explain why you function, operation, or p	roblem is that w	ill be satisfied by	ovide a complete scenario this a change to the standard. Ti in this Part II to be able to pro	he X12J Technical
D. RAMIFICATIONS: H	wou circled (2)	on Page 1, comp	ete this section. To ensure t	hat all manifestions of your
	corded and that		complete, circle below all sec	
TRANSACTION SET	Name Segment Position Loop Repeat Delete Segment	Purpose/Scope Require. Dos. Loop Structure	Table Note/Comment Max. Use Add Segment	
SEGMENT	identifier Add DE Require, Des, Comment	Name Delete DEPosition I Syntax Note	Definition n Segment Sementic Note	
DATA ELEMENT	Name Min/Max	Description	Туре	
CODE	Add code	Doloto Code	Review Code	
OTHER (e.g., X12.5, X12	.6):			
ERRORS NOTED IN THE	E STANDARD (G	ilve page no. and	other identification):	
				

Rev		/20

PP	No.		
		(Secretaria)	Calvi

ASC X12 NEW PROJECT PROPOSAL FORM

PROCEDURE: Only X12 subcommittees may use this form to register new development activities as X12 project proposals (PPs). Complete all pages. PPs approved by the X12 Procedures Review Board will be registered and assigned a PP number by DISA, and a Transmittal Form will be issued.

assigned a PP number by DISA, and	a Transmittal Form will be issued.							
Date and complete the form below. Type or print legibly in black ink and number all attachment pages consecutively. Submit to DISA prior to an ASC X12 meeting, or to X12J Technical Assessment Subcommittee during the subcommittee's agenda period at an ASC X12 meeting.								
Date Submitted: Date Approved by Subcommittee:								
Subcommittee Name: Task Group Name/No.:								
Joint Development Subcommittee	(If any):							
Circle one: (a) Transaction Set (b)	Guideline (c) Other							
Project Working Title:								
Official Delegate(s) for This Projec	t To Be Named on Transmittal Form:							
Name	Name							
Company								
Address	Address							
Address/ZIP	Address/ZIP							
Telephone	Telephone							

A. PURPOSE AND SCOPE FOR THE PROPOSED WORK: Provide a well-defined purpose/scope for the proposed work. See X12 Design Rules and Guidelines for requirements.
B. BACKGROUND: Provide details that will be helpful in reviewing the proposal. Who are the expected users? How will the standard be used? What business function(s) does it serve?. If the proposed standard overlaps the functionality of an existing standard or one in development, provide justification. If the proposal is not for a new standard or guideline, describe the project in detail. (Use attachments if necessary.)
C. OTHER STANDARDS INVOLVED: If applicable, identify any other business information standards that are similar/related to the proposal, and name standards developers (e.g., ANSI Accredited Standards Committees) whose activities may be involved or affected.
D. EXPECTED CONTENT/GENERAL DESCRIPTION: (OPTIONAL) Submitter may attach a preliminary draft the proposed standard or other supporting documentation. Discuss new segments, data elements, control structures, and changes to X12.5 or X12.6 that are required or anticipated. (Use attachments.)

4/1/90

FORM FOR NEW OR REVISED APPENDIX A CODE SOURCE REFERENCE

INSTRUCTIONS: Complete this form whenever a new data element or data element code is requested to be added which references a code list published by an external (non-X12) organization. Use one form for each new reference. This form may be used to revise current references; fill out the appropriate areas below. CIRCLE ONE, COMPLETE AS APPROPRIATE: (1) NEW REFERENCE (2) REVISED REFERENCE, Current reference number/name REFERENCE TITLE: If there is only one source for codes for the data element, the title should be the same as the data element name. If there are multiple codes referencing external code sources for the same data element, title should approximate the code definition. REFERENCE TITLE: DATA ELEMENTS USED IN: Give the data element reference number and name which directs the user to this Appendix A code source reference. Give the code ID (if assigned) if this is for a specific code of the data element. USED IN: DE No. _____, Code ID _____ SOURCE: Provide the name of the publication which contains the codes referenced. PUBLISHED IN: AVAILABLE FROM: Give the publisher, or other contact, from whom the user can obtain the document. Name/Attn of Company **Address** Address Address/ZIP ABSTRACT: Briefly describe the publication, its purpose, and indicate what codes it contains.

ABSTRACT:

DOCUMENT PREPARATION FOR INTERPRETATIONS. GUIDELINES AND CONTROL STANDARDS

Rev. 4/1/90

These instructions are provided to assist developers of interpretations, guidelines and control structure which are not transaction sets (for transaction sets use the New Transaction Set Development Form).

GENERAL: DISA provides title page and front matter for publications and copyedits the document according to DISA house style.

REVISIONS: If the document is a revision of a previously published interpretation, guideline or standard, provide a summary of the changes to the original that are contained in the document.

I INTERPRETATIONS

A formal interpretation of an X12TM Standard is considered part of the body of standards when it is approved for publication. The interpretation draft should state the issue presented by the requestor, state the proposed interpretation, and show as attachments any Work Requests that may be necessary to effect the interpretation within the subject standard. The draft interpretation is processed like any other subcommittee document.

II GUIDELINES

For publication purposes, guidelines are treated like a journal article. Basic requirements are given below.

ABSTRACT: This is a precise summary of the Purpose/Scope (see below), and may be identical to it if that is brief (two paragraphs); otherwise summarize the purpose/scope. It should contain enough information about the document to enable a reader determine what the guideline is intended to accomplish within an EDI environment.

PURPOSE AND SCOPE: This statement must indicate purpose of the guideline, e.g., the business function or operation addressed. Scope and any specific limitations of scope should be defined.

BODY OF TEXT: This may be a number of subsections logically organized. Provide sections for foreword, introduction, definition of terms and concepts, references and related standards, methodology, specifications, requirements, discussion, and conclusions, as appropriate to the subject.

ART AND GRAPHICS: Graphics or artwork necessary to illustrate the document are encouraged. Provide camera-ready copy if these are not already prepared and delivered on a WP diskette to DISA.

FOREWORD, FOOTNOTES, APPENDICES: These may be used for purposes of clarity, illustration, or general information, not as "part of the guideline." A statement indicating the material is for information purposes only and not part of the guideline shall appear at the beginning of a foreword or appendix.

III CONTROL STRUCTURES AND OTHER STANDARDS

For publication purposes, these documents are treated like guidelines (see Section II above). The requirements are the same, with the addition of the following:

NEW SEGMENTS AND DATA ELEMENTS: These may be defined within the text; however, since they represent changes to X12.22 and X12.3, they should be specified on a Work Request Form attached to the draft.

RELATED X12TM STANDARDS AND OTHER REFERENCES: These shall be identified in a section within the text.

Page Two

FORMAT: "This Draft Standard for Trial Use contains the format and establishes the data contents of the Transaction Set (____) for use within the context of an Electronic Data Interchange (EDI) environment. The transaction set (can be used to...)*

C. PURPOSE AND SCOPE This statement must indicate the full range of capabilities of the transaction set, and who the senders/receivers are. Explain the business function or operation that is addressed. Follow ASC X12 Design Rules and Guidelines and use this format:

FORMAT: "This standard provides the formst and establishes the data contents of the ______ Transaction Set within the context of an Electronic Data Interchange (EDI) environment. This transaction set (can be used to...)"

D. TRANSACTION SET TABLE(S) For each table provide the following information. FORMAT:

TABLE X

POSI		SEGMENT TITLE		MAX. USE.	LOOP REPEAT	note ref.
010	ST	Transaction Set Header	M	1	Not	9 1
020 etc.	88	Beginning Segment For	M	1	Com	ment 1

Note 1: This is a note. NOTES are part of the standard (numbered). Comment A: This is a comment. COMMENTS are not part of the standard (lettered).

E. APPENDIX EXAMPLES Examples are used to test the merit of the proposed transaction and to explain it to users. At least one example is mandatory. No recognizable proper names may be used in any example.

FIGURE 1: (Optional) Use a sample paper document using mock data. If used, data must be accurately mapped to Figure 2. Original graphics must be attached (8-1/2x11") so they can be copied.

FIGURE 2 (or EXAMPLE): Title the figure and provide a Business Scenario to explain to the reader what is going on in the example. Add the note: "In this example the asterisk (*) represents the data element separator and the N/L characters represent the segment terminator." Present EDI transmission data and its meaning in two columns, side-by-side. ZZ or ZZZ codes are d'ecouraged, since their usefuiness in an explanatory example is nil. FORMAT:

BUSINESS SCENARIO: In this transaction set the sender is XYZ Retail Center and the receiver is their supplier, Fantastic Products Manufacturing, Inc...etc.

EDI TRANSMISSION DATA

(TRANSACTION SET PURPOSE) DATA

ST*8XX*0005 N/L No. 0005 BB*01*79800* N/L 79800 etc. Begin Transaction Set 8XX; Control Original Transmission; Ref. No.

BASELINE AS OF: JANUARY 29, 1983

Pev. 5/10/90

		DM Number
		(Secretariat Only)
		Document No.
		(Developer Obtains from DISA)
		ASC X12
	NEW TRA	NSACTION SET DEVELOPMENT FORM
text processe	DNS: Use this form to ad by DISA. Use a new lot yet been prepared b	submit a draft transaction set for review by X12J Technical Assessment until it is r Transaction Set Development Form whenever revisions are proposed and a by DISA.
ATTACHME	NTS: Attach all pages;	use this form as the first. Follow these instructions for preparing materials.
The :	submitter must obtain a	a document number assignment from DISA. Post it to this form (above).
	ch a List of Revisions saction set standard re-	If the draft was previously reviewed by X12J or If this is a revised/redesigned quiring X12 ballot.
		orm to list all supporting data maintenance for the transaction set and attach it or revised codes for DE 143 and DE 479 at a minimum if required.
A Tra	ensmittel Form must a	accompany this document when it is submitted to DISA for distribution.
Use	the most recent X12 TM	Standards Development Workbook to check your document for accuracy.
A. SUBMITT	TER INFORMATION	
Submitter:	Name	
	Company	
	Address	
	Address/ZIP	
	Phone	
I declare tha		ask group whose position is represented here. official position of X12 WORK GROUP:
B. ABSTRAC	CT The Abstract is req	pistered with the American National Standards Institute. It is a precise summary
of the Purpos	se/Scope (see Section	C below). It may be identical to the Purpose/Scope if that is brief (two

paragraphs), otherwise summarize the purpose/scope. It should contain enough information about the standard to enable a potential user determine what equivalent paper transaction it represents or what the standard is

intended to do. Follow the format on page two.

Rev. 5/10/90 SAMPLE TRANSMITTAL FORM Initialized KEY DATE: February 15, 1990 John Doe DELEGATE'S NAME RESPONSIBLE SUBCOMMITTEE/TG# ASC X12Q XX Subcommittee/TG4 TRANSACTION SET/GUIDELINE TITLE X12.XX ABC/XYZ TRANSACTION SET (8XX) **BALLOT Document No.** ASC X12Q/90-051 Current Document No. ASC X12Q/90-004 Previous Document No. Project Proposal No. PP-999 Associated WR/DM No. DM 012-190 PROJECT PROPOSAL (DATE) 2/7/90 PP Review by X12J PRB Approves PP (DATE) 2/9/90 DEVELOPMENT PHASE: Project proposal approval through approval for X12 vote. **Document Submitted for DISA Text Processing** (DATE) Subcommittee Approves Draft for Review by X12J, Tech Assessment (DATE) (DATE) X12J Tech Assessment Review PRB Approves Document for X12 Vote (DATE) ORIGINAL BALLOT DATA (DISA): **Ballot Closed Date** (DATE) Tally/Comments Sent to Chair/Delegates (DATE) Tally Stats (Number and Percent) **Ballots Mailed** (100%) Ballots Returned (Approved App w/Comment (Disapproved

4.0.12

Abstained

BASELINE AS OF: JANUARY 29, 1963

Page Two							
COMMENT RESOLUTION PHASE: See Sections A, B and C. If the subcommittee at any time decides to reballot the document, PRB approval is required and response letters are not necessary. A. COMMENT RESPONSE LETTERS: An Open Forum must be scheduled at the next X12 meeting following the ballot closing date. All those who commented receive a comment response letter from the developing subcommittee. DISA records this process and handles the mailing.							
Response Letters Mailed Out by DISA	(DATE)						
Rebuttal Period (30 days) Closes	(DATE)						
ADJUSTED BALLOT DATA (DISA):							
30-Day Response Review Closed Date	(DATE)						
Tally/Comments Sent to Chair/Delegates	(DATE)						
Tally Stats (Number and Percent)	(5.4.5)						
Ballots Mailed (100%)							
Ballots Returned (_%)							
Approved (%)							
App w/Comment (_%)							
Disapproved (%)							
Abstained (%)							
B. SUBSTANTIVE REVISION: If ballot comments result in substantive re- reviewed by X12J and processed by DISA. The revised document is subm- period. DISA records this process/handles mailing. Subcommittees shouletters/revised documents concurrently. Subcommittee Approval of Revisions	hitted to X12 voters for a 30-day review ild conduct 30-day reviews for response						
X12J Review of Revisions	(DATE)						
DISA Mails Revised Document	(DATE)						
Substantive Revision 30-Day Review Closes	(DATE)						
ADJUSTED BALLOT DATA (DISA):							
30-Day Substantive Change Review Closed Date	(DATE)						
Tally/Comments Sent to Chair/Delegates	(DATE)						
Tally Stats (Number and Percent)							
Ballots Mailed (100%)							
Ballots Returned (%)							
Approved (%)							
App w/Comment (_%)							
Disapproved (_%)							
Abstained (_%)							

D	EP	AR	TM	ENT	OF	DEI	ENS	Ε	
D	RA	FT		M.E.	ÆN	TAT	TION	CON	ENTION

FOR DRAFT STANDARDS FOR TRIAL USE:

VERSION/RELEASE/SUBRELEASE ID CODE ASSIGNED:

C. CONTINUING OBJECTIONS. If there are continuing disapprovals after the 30-day review period, the document/disapprovals/responses/continuing objections are mailed to X12 members who originally cast a ballot, for another 30-day review, to give them an opportunity to change their vote. Continuing Objections Mailed to Chair/Delegate by DISA (DATE) DISA Mails Documents (DATE) 30-Day Review Closes (DATE) FINAL ADJUSTED TALLY (DISA): Whenever any disapprovals are withdrawn, a letter to this effect must be received in writing by DISA. Final Tally Results Sent to Chair/Delegate (DATE) Ballots Mailed (100%) Ballots Mailed (100%) Ballots Returned (%) App w/Comment (%) Disapproved (%) Abstained (%) PRB APPROVAL PHASE: After the comment resolution period, the subcommittee votes to submit the document to the PRB for approval to publish. Subcommittee Votes to Release to PRB (DATE) PRB Approves Publication (DATE)	Page Three	
DISA Mails Documents 30-Day Review Closes (DATE) FINAL ADJUSTED TALLY (DISA): Whenever any disapprovals are withdrawn, a letter to this effect must be received in writing by DISA Final Tally Results Sent to Chair/Delegate 30-Day Review Stats (Adjusted Tally) Ballots Mailed (100%) Ballots Returned (%) Approved (%) Approved (%) Disapproved (%) Abstained (%) PRB APPROVAL PHASE: After the comment resolution period, the subcommittee votes to submit the document to the PRB for approval to publish. Subcommittee Votes to Release to PRB (DATE)	document/disapprovals/responses/continuing objections are mailed to X	2 members who originally cast a bailot,
DISA Mails Documents 30-Day Review Closes (DATE) FINAL ADJUSTED TALLY (DISA): Whenever any disapprovals are withdrawn, a letter to this effect must be received in writing by DISA Final Tally Results Sent to Chair/Delegate 30-Day Review Stats (Adjusted Tally) Ballots Mailed (100%) Ballots Returned (%) Approved (%) Approved (%) Disapproved (%) Abstained (%) PRB APPROVAL PHASE: After the comment resolution period, the subcommittee votes to submit the document to the PRB for approval to publish. Subcommittee Votes to Release to PRB (DATE)	Continuing Objections Mailed to Chair/Delegate by DISA	(DATE)
FINAL ADJUSTED TALLY (DISA): Whenever any disapprovals are withdrawn, a letter to this effect must be received in writing by DISA. Final Tally Results Sent to Chair/Delegate (DATE) 30-Day Review Stats (Adjusted Tally) Ballots Mailed (100%) Ballots Returned (%) Approved (%) Approved (%) Disapproved (%) Abstained (%) PRB APPROVAL PHASE: After the comment resolution period, the subcommittee votes to submit the document to the PRB for approval to publish. Subcommittee Votes to Release to PRB (DATE)	_ · · · · · · · · · · · · · · · · · · ·	(DATE)
received in writing by DISA. Final Tatly Results Sent to Chair/Delegate (DATE) 30-Day Review Stats (Adjusted Tally) Ballots Mailed (100%) Ballots Returned (%) Approved (%) App w/Comment (%) Disapproved (%) Abstained (%) PRB APPROVAL PHASE: After the comment resolution period, the subcommittee votes to submit the document to the PRB for approval to publish. Subcommittee Votes to Release to PRB	30-Day Review Closes	(DATE)
30-Day Review Stats (Adjusted Tally)		awn, a letter to this effect must be
Ballots Malled (100%) Ballots Returned (_%) Approved (_%) App w/Comment (_%) Disapproved (_%) Abstained (_%) PRB APPROVAL PHASE: After the comment resolution period, the subcommittee votes to submit the document to the PRB for approval to publish. Subcommittee Votes to Release to PRB (DATE)	•	(DATE)
Ballots Returned (_%) Approved (_%) App w/Comment (_%) Disapproved (_%) Abstained (_%) PRB APPROVAL PHASE: After the comment resolution period, the subcommittee votes to submit the document to the PRB for approval to publish. Subcommittee Votes to Release to PRB (DATE)	· · ·	
Approved (_%) App w/Comment (_%) Disapproved (_%) Abstained (_%) PRB APPROVAL PHASE: After the comment resolution period, the subcommittee votes to submit the document to the PRB for approval to publish. Subcommittee Votes to Release to PRB (DATE)		
App w/Comment (_%) Disapproved (_%) Abstained (_%) PRB APPROVAL PHASE: After the comment resolution period, the subcommittee votes to submit the document to the PRB for approval to publish. Subcommittee Votes to Release to PRB (DATE)		
Disapproved (_%) Abstained (_%) PRB APPROVAL PHASE: After the comment resolution period, the subcommittee votes to submit the document to the PRB for approval to publish. Subcommittee Votes to Release to PRB (DATE)		
Abstained (_%) PRB APPROVAL PHASE: After the comment resolution period, the subcommittee votes to submit the document to the PRB for approval to publish. Subcommittee Votes to Release to PRB (DATE)		
PRB APPROVAL PHASE: After the comment resolution period, the subcommittee votes to submit the document to the PRB for approval to publish. Subcommittee Votes to Release to PRB (DATE)		
to the PRB for approval to publish. Subcommittee Votes to Release to PRB (DATE)	Abstained (%)	
	· · · · · · · · · · · · · · · · · · ·	mmittee votes to submit the document
PRB Approves Publication (DATE)	Subcommittee Votes to Release to PRB	(DATE)
	PRB Approves Publication	(DATE)

•	20	F	<u>~</u>	•
•			u	4

TRANSMITTAL FORM INSTRUCTIONS:

GENERAL: This Transmittal Form is a TURNAROUND DOCUMENT which records the history/current status of a project document. It is used to exchange information between the Secretarist and the committees of X12. Information is cumulative (add on). This form is attached to the document whenever it is issued for distribution (it is mandatory for submitting documents to DISA, X12J Technical Assessment, and the PRB). Document control numbers are still required on each document, and new numbers are required whenever it is revised.

KEY DATE: This is used to identify the latest version of the document (date associated with the current transmittal form update).

DELEGATE: Each subcommittee designates an individual (delegate) from the group responsible for the project. The Secretarist must be informed if the delegate changes.

INITIATION: Primary data is recorded by DISA on the initialized form after the project proposal is approved by the PRB. The subcommittee chair and delegate(s) receive the initialized Transmittal Form from DISA; thereafter, they are responsible for recording the appropriate subcommittee approval dates. The chair/delegate will receive a copy of the updated transmittal form whenever it is revised by DISA.

UPDATING: At each appropriate step, DISA will POST fresh data to the form, ADD the next appropriate blanks to the form, and SEND it to the subcommittee chair/delegate at each status change. The delegate must POST the form with fresh data at each status change for which the subcommittee is responsible and SEND it with the appropriate document to the Secretarist.

47649

ASC X12 BALLOT COMMENT RESPONSE LETTER FORMAT

GENERAL INFORMATION

AFTER AN X12 BALLOT, THE RESPONSIBLE SUSCOMMITTEE (OR ITS DESIGNATED TASK GROUP) MUST respond in writing to all disapproved votes. The Organization & Procedures manual (OPM) states that you are not required to respond to those members who approved with comment, but typically all commenters are responded to. The OPM states that all comment responses must be coordinated with the Subcommittee Chair.

There are two response letter formats from which to choose: a generic letter which will be sent to all commenters, and a individualized response to each commenter. See instructions below and the attachments.

OPTION 1: GENERIC LETTER (MASTER LETTER) TO ALL COMMENTORS

You may prepare one letter to be sent to all commentors. Every comment received must be reproduced in your letter. For each comment Setted, name the commenter (X12 member company name) and the vote recorded for them. Link your response to the comment. If you choose this option, you may group the comments which are similar and respond to them as a group. Every member that deapproved must be responded to.

NOTICE INDIVIOUAL LETTER TO EACH COMMENTOR

You may propers one letter for each commenter. If you choose this option, you need not repeat the original comment provided on the ballot. Follow the usual business letter style and the general instructions below. Every member that disapproved must be responded to.

METRUCTIONS

STEP 1: Plan to print the first page of your letter(s) on ASC X12 isterhead. If you don't have letterhead, you can obtain some from the Secretariat or reproduce the sample attached. You may not use personal, corporate, or blank letterhead for your commont response inter(s).

STEP 2: Cell the Secretaries for a document control number. This number must appear in the upper right corner of the first page of the letter. If you send an individualized letter to each commenter, the document control number assigned for the first letter will be followed by an "A" (e.g., ASC X12F/TGB/80-120A), etc.

STEP 3: Choose your letter format option (see General Information above).

STEP 4: Propers the letter following the outline, below using a typical business letter format.

- a. Provide a contact name (sender's) in the upper right corner box of the letterhead; include phone number.
- b. Print the document control number under the letterhead box.
- c. Print the date under the document control number.
- d. Address the letter to the individual, or for a generic letter include an addressee line and subject line.
- e. Include an introductory paragraph so the issue is properly identified to the addresses.
- 1. You may wish to recep the ballot tally (from your Transmittal Form) for the information of the reader.

STEP 4: Forward the letters to the Secretariat, Atlantion Secretariat Services, with a cover letter requesting distribution of the response letter(s) you have prepared. When the letters have been distributed, the project delegate and subcommittee chair will receive an updated Transmitted Form which has the mailing date and 30-day review period closing date posted.

Attachments:

X12 Letterhead Sample Sample Master Response Letter Sample Individual Letter

ASC X12-ELECTRONIC DATA INTERCHANGE (EDI)

Tim Jonescy (999) 999-9999

Accredited Standards Committee operating under the procedures of the American National Standards Institute

Dan Smithey (999) 999-9999

Document No

ASC X12C/TG20/90-999 June 25, 1990

TO:

X12 Members Who Commented on Modifications to

X12.xx Control Structures

RE:

Response to Comments on December Ballot

DMs 205289, 215289, 317289

Thank you for your comments. This ballot involved modifications to X12.00. Of the 327 ballots mailed, 153 ballots were returned. Of these, 81 approved, 15 approved with comment, 20 disapproved with comment and 37 abstained.

In general, the vote responses were in favor of the modifications. The majority of the comments focused on the impact of these modifications on the presentation of information in the X12.22 Segment Directory. The proposed modifications and the resulting presentation in the segment directory have been reworked in response to these comments. A revised modification to X12.xx was reviewed by Technical Assessment at the June ASC X12 meeting. Modifications to the document have been made which reflect responses to the comments from this ballot, and a revised copy of X12.xx is being distributed to all who voted on this issue, for 30-day review of revisions.


Specific responses to comments follow.

COMMENT: Automobile Corporation

"Add the following note to Paragraph 3.3: NOTE: Communication protocol characters should be excluded from the character set."

RESPONSE:

The cover letter sent out with the voting package explained that the intent was to obtain consensus on the proposed modifications to X12.xx. X12.xx is a difficult standard to amend. We request that ballot responses be considered on the merits of the recommended modifications and not on the standard as a whole. Your comment was outside the scope of the requested modifications.



Page Two

COMMENT: Aircraft Engine Corporation

"Some consideration for Abstract Syntax Notation One (ASN.1) should be allowed.

- 1. ASN.1 is capable of defining all of the necessary inter-relations needed by X12 transactions.
- 2. ASN.1 requires less characters to define the same information.
- 3. ASN.1 is the encoding scheme used by most OSI work.

RESPONSE:

The recommendation to consider usage of ASN.1 encoding reaches far beyond the scope of the modifications requested in this ballot. Activities such as this are best submitted as separate work requests.

COMMENT: Some Software Inc.

"Conditionality of data elements should be left to the discretion of implementation guidelines and agreements. There is much discussion at times as far as whether certain data elements should be mandatory or not; many application systems are incapable of providing certain 'mandatory' information and, as such, filler-type data must be inserted."

RESPONSE:

The issue of data element conditionality as a whole is a much broader subject than was intended to be addressed within the scope of this ballot. This ballot was intended to provide a means for consistent documentation and application of already existing conditional structures. If the commentor believes that the conditional structure should be removed from the standard, the task group recommends that this be submitted as a separate work request.

Etc.

ASC X12-ELECTRONIC DATA INTERCHANGE (EDI)

Accredited Standards Committee operating under the procedures of the American National Standards Institute

Joe Somebody Chair TG19, X12C (999) 999-9999

Document No

ASC X12C/TG8/90-998A August 10, 1990

Ms. Jane Doe American Bank One Central Plaza Middle America, MO 99999

RE: Response to Ballot Comments on ASC X12 Model Guideline


Dear Ms. Doe:

Subcommittee X12C has empowered its Task Group 19 to provide responses to the comments on this ballot. The members of TG19 wish to thank all X12 members who took the time and effort to vote on this guideline. We especially thank each individual who provided comments, whether in approval or disapproval of the guideline. We recognize and appreciate your careful review of this document.

Our response is keyed to the numbered items in the comments attached to your ballot.

RESPONSE

- 1. We agree with your comment. In Section 4.2.2, we have replaced 'we utilize rules ...' with 'rules ... are utilized'.
- 2. The confusion between Section 4.2.3 and Section 6.2 only exists because of the example we chose in the first section. This is a hypothetical example, of a simplified model. Headers and trailers can be placed on the content at ALL levels, and do not necessarily correspond to ASC X12 headers and trailers.
- 3. We agree with your comment. Section 6.2 has been changed so that "the establishment of ..." was added to items 1 and 4.



5.0 GLOSSARY

This chapter contains ASC X12 and DoD specific glossaries.

5.1 X12 GLOSSARY

ANSI

American National Standards Institute

ANSI Standard

A document published by ANSI that has been approved through the consensus process of public announcement and review. Each of these standards must have been developed by an ANSI committee and must be revisited by that committee within 5 years for update. See Draft Standard for Trial Use (DSTU).

Area Transaction Set

Identifies a predefined area within a transaction set (header, detail, summary) containing segments and their various attributes.

ASC X12

Accredited Standards Committee, X12 comprises industry members who create EDI standards for submission to ANSI for subsequent approval and dissemination; or for submission to the UN/ECE for approval and submission of UN/EDIFACT stan-dards.

Authentication

A mechanism which allows the receiver of an electronic transmission to verify the sender and the integrity of the content of the transmission through the use of an electronic "key" or algorithm which is shared by the trading partners. This is sometimes referred to as an electronic signature.

Compliance Checking

A checking process that is used to ensure that a transmission complies with ANSI X12 syntax rules.

Conditional (C)

A data element requirement designator which indicates that the presence of a specified data element is dependent on the value or presence of other data elements in the segment. The condition must be stated and must be computer processable.

Control Segment

A Control Segment has the same structure as a Data Segment but is used for transferring control information for grouping data segments. Control Segments are Loop Control Segments (LS/LE), Transaction Set Control Segments (ST/SE), and Functional Group Control Segments (GS/GE), defined in X12.6, and Interchange Control Segments (ISA/IEA/TA1) defined in X12.5.

Data Element

The basic units of information in the EDI standards containing a set of values that represent a singular fact. They may be singlecharacter codes, literal descriptions, or numeric values.

Data Element Length

This is the range, minimum to maximum, of the number of character positions available to represent the value of a data element. A data element may be of variable length with range from minimum to maximum, or it may be of fixed length in which the minimum is equal to the maximum.

Data Element Reference Number

Reference number assigned to each data element as a unique identifier.

Data Element Requirement Designator

A code defining the need for a data element value to appear in the segment if the segment is transmitted. The X12 codes are mandatory (M), optional (O), or conditional (C). DoD may "require" a segment which is optional by X12 standards.

Data Element Separator

A unique character preceding each data element that is used to delimit data elements within a segment. Dod uses "*" as the delimiter.

Data Element Type

A data element may be one of six types: numeric, decimal, identifier, string, date, or time.

Delimiters

The delimiters consist of two levels of separators and a terminator. The delimiters are an integral part of the transferred data stream. Delimiters are specified in the interchange header and may not be used in a data element value elsewhere in the interchange. From highest to lowest level, the separators and terminator are segment terminator and data element separator.

DISA

Data Interchange Standards Association. A nonprofit organization funded by ASC X12 members which serves as the Secretariat for X12.

DSTU

Draft Standard for Trial Use. Represents a document approved for publication by the full X12 committee following membership consensus and subsequent resolution of negative votes. (Final Report of X12 Publications Task Group). The Draft EDI Standard for Trial Use document represents an ASC X12 approved standard for use prior to approval by ANSI. See ANSI Standard.

EDI

Electronic Data Interchange. The computer application to computer application exchange of business information in a standard format.

Electronic Envelope

Electronic information which binds together a set of transmitted documents being sent from one sender to one receiver.

Element Delimiter

A single-character which follows the segment identifier and separates each data element in a segment except the last.

Functional Group

A group of one or more transaction sets bounded by a functional group header segment and a functional group trailer segment.

Functional Group Segments

GS/GE segments identify a specific functional group of documents such as purchase orders.

Industry Conventions

Defines how the ASC X12 standards are used by the specific industry

Industry Guidelines

Defines the EDI environment for using conventions within an industry. It provides assistance on how to implement X12 standards.

Interchange Control Segments

ISA/IEA segments identify a unique interchange being sent from one sender to one receiver (see electronic envelope).

Interchange Control Structure

The interchange header and trailer segments envelop one or more functional groups or interchange-related control segments and perform the following functions: (1) defines the data element separators and the data segment terminators, (2) identifies the sender and receiver, (3) provides control information for the interchange, and (4) allows for authorization and security information. (X12.5)

Loop

A group of semantically related segments; these segments may be either bounded or unbounded (X12.6). The N1 loop is an example of a loop, which includes segments N1 to PER for name and address information.

Mandatory (M)

A data element/segment requirement designator which indicates the presence of a specified data element is required.

Mapping

The process of identifying the standard data element's relationship to application data elements.

Max Use

Specifies the maximum number of times a segment can be used at the location in a transaction set

Message

Entire data stream including the outer envelope

Optional (O)

A data element/segment requirement designator which indicates the presence of a specified data element/segment is at the option of the sending party which can be based on the mutual agreement of the interchange parties.

Oualifier

A data element which identifies or defines a related element, set of elements, or a segment. The qualifier contains a code taken from a list of approved codes.

Repeating Segment

A segment that may be used more than once at a given location in a transaction set. See Max Use.

Security

System screening which denies access to unauthorized users and protects data from unauthorized uses

Segment

Segments consist of logically related data elements in a defined sequence. A data segment consists of a segment identifier, one or more data elements each preceded by an element separator, and ends with a segment terminator.

Segment Directory

Provides the purpose and format of the segments used in the construction of transaction sets. The directory lists each segment by name, purpose, identifier, the contained data elements in the specified order, and the requirement designator for each data element.

Segment Identisier

A unique identifier for a segment composed of a combination of two or three upper-case letters and digits. The segment identifier occupies the first-character positions of the segment. The segment identifier is not a data element. The segment identifier in EDIFACT is a component data element — part of a composite data element consisting of a segment identifier and an explicit looping designator.

Segment Terminator

A unique character appearing at the end of a segment to indicate the termination of the segment, e.g., N/L.

Syntax

The grammar or rules which define the structure of the EDI standards (i.e., the use of loops, qualifiers, etc.). Syntax rules are published in ANSI X12.6.

Transaction Set

The transaction set unambiguously defines, in the standard syntax, information of business or strategic significance and consists of a transaction set header segment, one or more data segments in a specified order, and a transaction set trailer segment.

Transaction Set ID

An identifier that uniquely identifies the transaction set. This identifier is the first data element of the transaction set header segment.

Translation

The act of accepting documents in other than standard format and translating them to the standard.

Version/Release

Identifies the publication of the standard being used for the generation or the interpretation of data in the X12 standard format. May be found in the Functional Group Header Segment (GS) and in the Interchange Control Header Segment (ISA). See Control Segment.

VICS Committee

Voluntary Interindustry Communications Standards for Electronic Data Interchange

X12

The ANSI committee responsible for the development and maintenance of standards for electronic data interchange (EDI).

X12.5

Interchange Control Structure. This standard provides the interchange envelope of a header and trailer for the electronic interchange through a data transmission, and it provides a structure to acknowledge the receipt and processing of this envelope.

X12.6

Application Control Structure. This standard describes the control segments used to envelop loops of data segments, to envelop transaction sets, and to envelop groups of related transaction sets.

5.2 DoD GLOSSARY

AIS

Automated Information Systems

ASD(P&L)

Assistant Secretary of Defense (Production and Logistics)

DES

Data Encryption Standard

DISA

Defense Information Systems Agency

DI A

Defense Logistics Agency

ISA

Interchange Control Header Identifier

NIST

National Institute of Standards and Technology

NTE

Note Identifier

PLUS

Protection of Logistics Unclassified/Sensitive Systems

UN/EDIFACT

EDIFACT; Electronic Data Interchange for Administration, Commerce, and Transport

REPORT DOCUMENTATION PAGE

Form Approved OPM No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources gathering, and maintaining the data needed, and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Information and Regulatory Affairs, Office of Management and Budget, Washington, DC 20503.

1. AGENCY USE ONLY (Leave Blank)	2. REPORT DATE Jan 93	3. REPORT TYPE A Draft	ND DATES COVERED
4. TITLE AND SUBTITLE DoD Electronic Data Interchange (EDI) Convention: ASC X12 Transaction Set 838 Trading Partner Profile (Confirmation) (Version 003020)			5. FUNDING NUMBERS C MDA903-90-C-0006 PE 0902198D
6. AUTHOR(S) Stephen Luster Richard Modrowski			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Logistics Management Institute 6400 Goldsboro Road Bethesda, MD 20817-5886			8. PERFORMING ORGANIZATION REPORT NUMBER LMI~DL203LN16
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) DoD Executive Agent for EC/EDI/PLUS Defense Logistics Agency DLA-ZIE, Cameron Station Alexandria, VA 22304			10. SPONSORING/MONITORING AGENCY REPORT NUMBER
11. SUPPLEMENTARY NOTES Prepared in cooperation with Da Committee X12	ta Interchange Standards Associatio	n, the Secretariat and administr	ative arm of the Accredited Standards
12a. DISTRIBUTION/AVAILABILITY STATEMENT A: Approved for public release; distribution unlimited			12b. DISTRIBUTION CODE
	•		ds or "convention" the Department of Trading Partner Profile (003020).
14. SUBJECT TERMS Electronic Data Interchange; EDI; DoD EDI Convention: Electronic Commerce; ANSI X12; X12; electronic standards; electronic business standards; computer to-computer exchange of data; electronic documents;			
electronic records; paperless environment; conventions			16. PRICE CODE
17. SECURITY CLASSIFICATION	18. SECURITY CLASSIFICATION	19. SECURITY CLASSIFICATION	20. LIMITATION OF ABSTRACT